


Radio Remote Control Systems

## HANITO-13

Crane scale

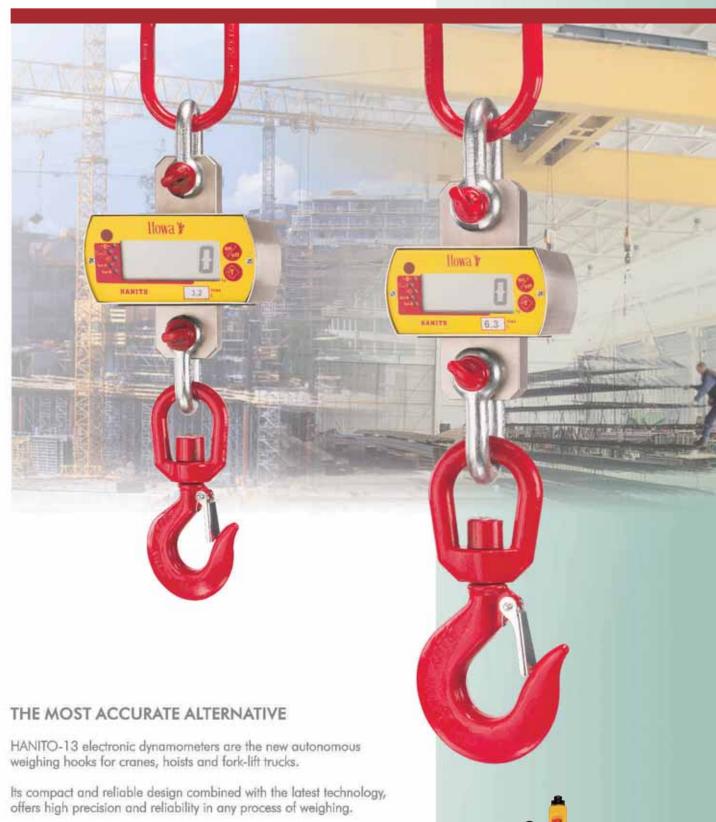

## TECHNICAL SPECIFICATIONS Hanito-13

Capacity from 300 to 10.000 Kg.

Until 8 different capacities.

LCD Display with digits of 25mm. Digits in red leds, as option.

Painted housing. Accuracy: 0,05%

Operating temperature:  $-10^{\circ}$  to  $+50^{\circ}$  C.

Protection rating: IP 55. 5 status indicators.


Programmable automatic switch off. Multilayer electronic anti interferences. Indicators: Tare, overload and low battery.

Power supply by long-lasting rechargeable batteries.

Supplied with: ring, two shackles, rotating hook, and charger.

Capacity	Resolution	Dimensions (mm)				Weight
(Kg)	(Kg)	Α	В	С	D	(Kg)
300	0,1	500	235	370	400	4
500	0,2	500	235	370	400	4
1.000	0,5	500	235	370	400	4,5
2.000	1	550	260	370	400	5
3.200	1	570	265	440	430	5,5
5.000	2	700	330	535	595	11
6.300	2	770	335	535	600	14
10.000	5	840	350	610	710	21





## **OPTIONS**

Infrared control for OFF, TARE operations, adding memory, totalize and delete. Remote control for OFF, TARE operations, adding memory, totalize and delete.

PLUS Heat protection

Anti shock protection

High brightness red digits

24 hours service: with 2 interchangeable batteries set, guick connector.

Transport container box.

Pre selection of load, included with remote control.

Maximum peak indication.







